


Vacuum Solenoid Valves DN16 ISO-KF NC

2/2-Wege Inline-Vacuum- / Gas Inlet Valve for High Vacuum Applications

Specification

2/2-Way Valve	Electromagnetic
Flange Size	DIN 28 403 / ISO 2861/1 / KF16
Nominal Width	DN 3,5
Pressure Range	0-1 bar absolute
Function	NC (normally closed)
Materials	Al Si1MGMn 1.4105, 1.4303, 1.4310
Usage	for Air-, Gas- Vacuum
Media Temperature	-10°C to 120°C
Ambient Temp.	max. 50°C
Leak Rate int./ext.	<1*10 ⁻⁹ mbar l/sec
Endurance	min. 500 000 Cycles
Voltage Options	12V AC/DC to 230V AC/DC

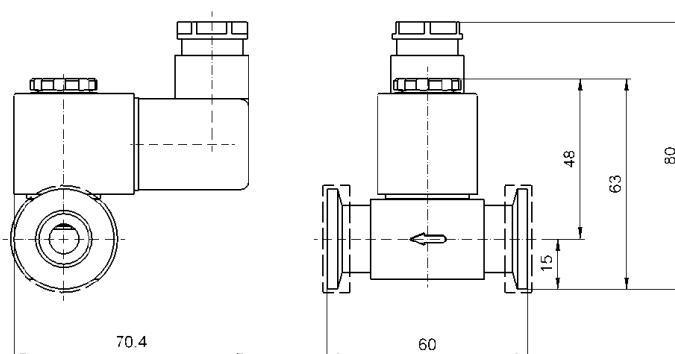

Order Information

Vacuum / Gas Inlet Valve DN16 ISO-KF, NC (normally closed)
 Solenoid 12 V DC, 6.2 W incl. Connector
 Solenoid 24 V DC, 6.8 W incl. Connector
 Solenoid 230 V AC, 10.5 VA incl. Connector
 Others voltages on request

Order No. 1006002675
 Order No. 1006003523
 Order No. 1006002747
 Order No. 1006002656